

300x300MM

**SOMANY**  
Tiles | Bathware

**ZAMEEN SE JUDEY**



**SOMANY**

Somany Ceramics Limited : Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: Office no. 7-14, 4th Floor, Aggarwal Mall, Opp. Sola Bhagwat Vidyapeeth, S.G. Road, Sola, Ph.: 079-27661103.

Registered office: 2, Red Cross Place, Kolkata-100 001

www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:  
www.somanyceramics.com



Find us at:  
www.facebook.com/SomanyCeramic



Find us at:  
www.twitter.com/SomanyCeramic



UNIT-1



**DURAGRES**  
**SLIM 8MM**



DURAGRES  
SLIM 8MM

MATT FINISH

GROUP 3


300X300MM  
MATCHING FLOOR TILES



VIBE MAIOLICA FUSION




VIBE MOZART GRIS

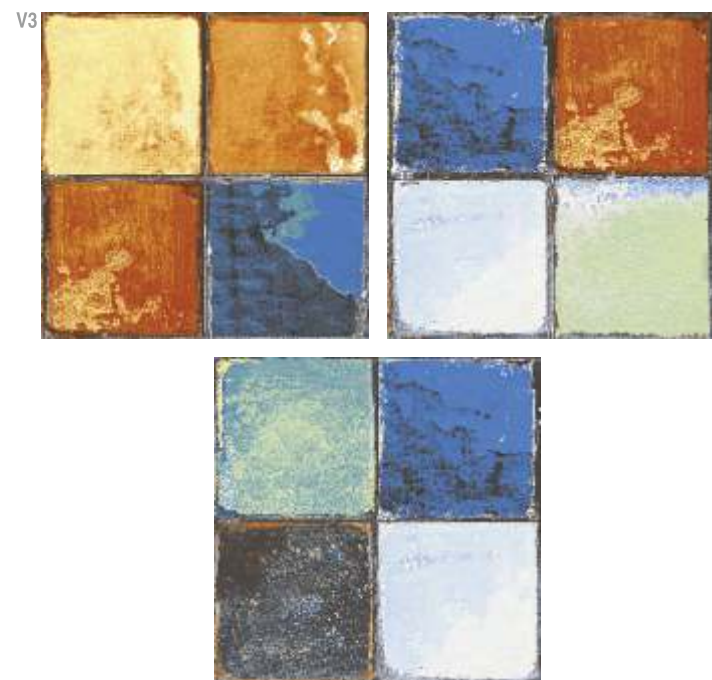

VIBE GERZZO FUSION



VIBE NILES FUSION

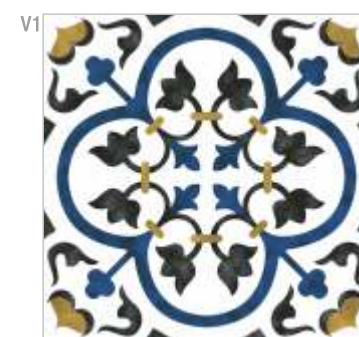

VIBE CULTO BLUE



VIBE HORTA BLUE



VIBE TESSUTO BROWN



VIBE VEZZO FUSION



VIBE ASCONA BEIGE



VIBE ASCONA COTTO



VIBE ASCONA MUSHROOM



VIBE ASCONA AZURE

DURAGRES  
SLIM 8MM



MATT FINISH

GROUP 3

300X300MM  
MATCHING FLOOR TILES




VIBE LIGNUM MAHOGANY

MATCHING WITH 300X1200MM  
BELLA VIENA WOOD ROBBLE



VIBE ORAN TEAK

MATCHING WITH 300X1200MM  
BELLA ASCOT WOOD TEAK  
BELLA MOLVENA WOOD TEAK

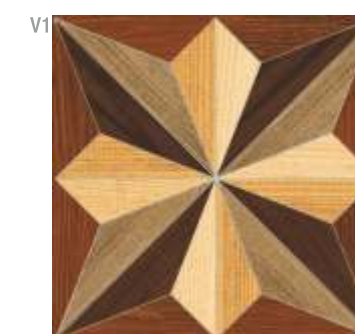

VIBE ZAGORA ROBBLE

MATCHING WITH 300X1200MM  
BELLA MOLVENA WOOD TEAK  
BELLA OXFORD WOOD TEAK  
BELLA ONTANO WOOD TEAK



V1

VIBE MACERA CREMA  
MATCHING WITH 300X600MM  
VIVO BUXI SERIES  
VIVO SEUL SERIES  
VIVO PIZZARA SERIES  
VIVO PORTLAND SERIES



V1

VIBE MACERA OLIVE  
MATCHING WITH 300X600MM  
VIVO EMPIRE SERIES  
VIVO LUMAN SERIES  
VIVO DAZZLE SENSATION BROWN SERIES




V1

VIBE MACERA BIANCO  
MATCHING WITH 300X600MM  
VIVO ORNA CLOVIS SERIES



V1

VIBE MACERA GREY  
MATCHING WITH 300X600MM  
VIVO YUTE SERIES  
VIVO PEGASUS GREY SERIES  
VIVO DAZZLE SENSATION GREY SERIES

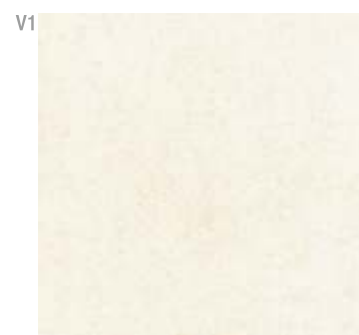

V1

VIBE PIEDRAS BONE  
MATCHING WITH 300X600MM  
VIVO PIZZARA BIANCO SERIES  
VIVO ALAMO SERIES



V1

VIBE PIEDRAS BROWN  
MATCHING WITH 300X600MM  
VIVO PEGASUS BROWN SERIES



V1

VIBE PIEDRAS CAFE  
MATCHING WITH 300X600MM  
VIVO PIZZARA BROWN SERIES  
VIVO FELIX SERIES  
VIVO ALTAI MOCHA SERIES



V3

VIBE BALTICO CREMA  
MATCHING WITH 300X600MM  
VIVO BALTICO SERIES



V2

VIBE BYRON NATURAL  
MATCHING WITH 300X600MM  
VIVO ORNA CLARA SERIES  
VIVO CALCUTTA SILK SERIES  
VIVO BYRON SERIES



V3

VIBE CAVA GREY DARK  
MATCHING WITH 300X600MM  
VIVO GRETA SERIES  
VIVO ARGENT GREY SERIES  
VIVO BISEL SERIES  
VIBE CAVA GREY SERIES



V2

VIBE CLIFF MARFIL  
MATCHING WITH 300X600MM  
VIVO ORNA CRISTA SERIES  
VIVO CLIFF MARFIL SERIES



V3

VIBE ESTILO BIANCO  
MATCHING WITH 300X600MM  
VIVO ESTILO SERIES


**PACKAGING DETAIL**

Nominal Size(mm)	Thickness (mm)	No of Pcs.	Average Weight(Kg)	Area Covered
300X300 MM SLIM 8MM	8.0	10	15	0.90 Sq. Mtr/ 9.684 Sq. Ft.

**TECHNICAL SPECIFICATION FOR 300x300 mm SLIM 8MM**

Characteristics	Requirement as per IS 15622 :2017 EE 0.08 Group B I a	Requirement as per ISO 13006 ≤ 0.5% Group B I a	Our Values	Test Method
<b>A Dimension &amp; Surface Quality</b>				
i Length & Width	± 0.10%	± .6%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
ii Thickness	± 5.00%	±5.0%	± 4.0%	
iii Straightness of Side	± 0.10%	± 0.50%	± 0.10%	
iv Rectangularity	± 0.10%	±0.50%	± 0.10%	
v Surface Flatness				
a Center curvature (%) ( max.Deviation)	± 0.50%	± 0.50%	± 0.2 %	
b Edge curvature (%) ( max.Deviation)	± 0.50%	± 0.50%	± 0.2 %	
c Corner warpage (%) ( max.Deviation)	± 0.50%	± 0.50%	± 0.2 %	
vi Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
<b>B Physical Properties</b>				
i Water Absorption	Av E ≤ 0.08 %, Individual 0.1 max	Av ≤ 0.5 %, Individual 0.6% max	Av 0.08 %	IS 13630 Part 2/ ISO 10545-3
ii Modulus of Rupture [N/mm <sup>2</sup> ]	Av 35, Individual 32 min	Av 35, Individual 32 min	Min-36	IS 13630 Part 6/ISO 10545-4
iii Breaking Strength in N	1300	1300	Min 1300	
iv Moisture Expansion in mm/m	0.02	Declared Valueuf	0.02	IS 13630 Part 3/ISO-10545-10
v Scratch Hardness of surface (Mohs)	Min 5	N.A	Min 6	IS 13630 Part 13
vi Resistance to Abrasion of glazed tiles( Class I to V )	Min II	Abrasion Class & Cycle passed	Class IV (for Non VC)	IS 13630 Part 11 /ISO 10545-7
vii Coefficient of linear thermal expansion from emblant temperature to 100 0 C	6 X 10 <sup>-6</sup> K <sup>-1</sup> , max	Declared Valueuf	Max 6 X 10 <sup>-6</sup> K <sup>-1</sup> , max	IS 13630 Part 4/ ISO 10545-8
viii Thermal Shock Resistance	10 cycle min	Passed According to EN-ISO 10545-1g	10 Cycle Passed	IS 13630 Part 5/ISO-10545-9
xi Crazing Resistance	4 cycle @ 7.5bar min	Passed According to EN-ISO 10545-1g	4 Cycle Passed	IS 13630 Part 9/ISO 10545-11
Impact Resistance as Co-efficient of Restitution (COR)	0.55 min	Declared Valueuf	0.75-0.90	ISO 10545-5
Frost Resistance	Required,	Passed According to EN-ISO 10545-1g	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
<b>C Chemical Properties</b>				
i Stain Resistance	Min Class-1	Min Class 3	Min Class 1	IS 13630 Part 8 &ISO 10545-14
ii Resistance to household chemicals	Min Class AA	Min Class GA	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Valueuf	Min Class AA	

V2



**VIBE GRIZZLY LIGHT**

MATCHING WITH 300X600MM  
VIVO ORNA ESME SERIES  
VIVO PALADIO SERIES  
VIVO GRIZZLY SERIES

V3



**VIBE LAURENZA LIGHT**

MATCHING WITH 300X600MM  
VIVO CARTER SERIES  
VIVO LAURENZA SERIES

V3



**VIBE LAVINA BIANCO**

MATCHING WITH 300X600MM  
VIVO FRONS SERIES  
VIVO ZAIRO SERIES  
VIVO LAVINA SERIES

V3



**VIBE MATERA DARK**

MATCHING WITH 300X600MM  
VIVO MATERA SERIES

V2



**VIBE MORENO NATURAL**

MATCHING WITH 300X600MM  
VIVO MORENO SERIES

V4



**VIBE ORLIN SUPER WHITE**

MATCHING WITH 300X600MM  
VIVO ORLIN SERIES  
VIVO GLACIER WHITE SERIES  
VIVO LEVIGATO BLACK AND WHITE SERIES

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see physical sample before placing the order. Technical specifications for Somany tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation, company will not entertain complaints, once the tiles are laid/fixd. Complaints will not be entertained for Borders, Highlighters.